




MODEL: 03-001040-001 DATA SHEET

Operational Parameters		
Parameter	Values	Notes
Number Of Channels:	3	
Channel Selection Control:	Manually Switch	SP3T rotary switch
Channel Indicator:	3 Red Illuminating Lamps	
Channel-1 Frequency Range:	DC to 40GHz	bypass
Channel-1 Insertion Loss:	1.0 dB	typical
Channel-2 Frequency Range:	1GHz to 18GHz	amplifier
Channel-2 Gain:	36 dB	minimum
Channel-2 Output Power at 1 dB Compression:	21 dBm	minimum
Channel-3 Frequency Range:	18GHz to 40GHz	amplifier
Channel-3 Gain:	36 dB	minimum
Channel-3 Output Power at 1 dB Compression:	18 dBm	minimum
RF Input/Output VSWR:	2.2:1	1GHz to 40GHz
RF Input/Output Connector Type:	2.92 mm jack	
AC Power Supply Input Voltage Range:	100 V _{AC} to 260 V _{AC}	
AC Power Supply Connector Type:	IEC Socket	fused
Power Switch:	Red Illuminated Rocker	rear
Enclosure Dimensions:	3.5" H x 8.5" W x 10.0" D	white
Enclosure Color:	White	powder coated
Enclosure Includes:	Protective Caps With Chain	for the 2.92 mm jacks
	Wrap Around Handel	
	4 Polymer Feet	rear
	4 Rubber Feet	bottom
	6' AC Power Cable	with velcro wrap strap

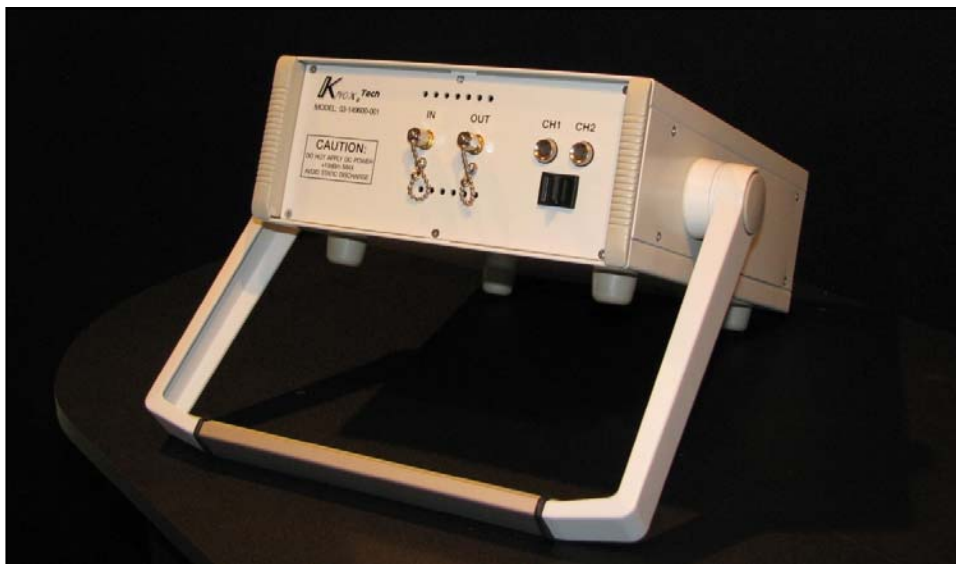

the image may not represent the actual model style

Knox Electronic Technologies Incorporated
PO Box 1507
North Hampton, NH 03862
(603) 379-2595
info@knoxetech.com
www.knoxetech.com